

PRETAPPED CONNECTORS



Design Advantage

- Push-in socket joint
- Lead Free CI A54G4 NCC Volume 3 Compliant
- AS/NZS2280 Amendment 1. Compliant

Technical Detail

Range DN100 and DN150, Tapped 20(3/4")

Pressure PN16

Socket Rubber Ring Joint

Specification Dual and Quad Outlets,
Blue and Lilac

Applications Suitable for property service connections





Compliance

- AS/NZS 2280 Licence WM-022892 and OMK30047
- WSAA PA 1624



DN	L	COLOUR	TAPPING	
			SIZE	NO. OF TAPPINGS
100	143	Blue/Lilac	20mm (3/4")*	2
100	151	Blue/Lilac	20mm (3/4")*	4
150	152	Blue/Lilac	20mm (3/4")*	2
150	152	Blue/Lilac	20mm (3/4")*	4

* Stocked as standard

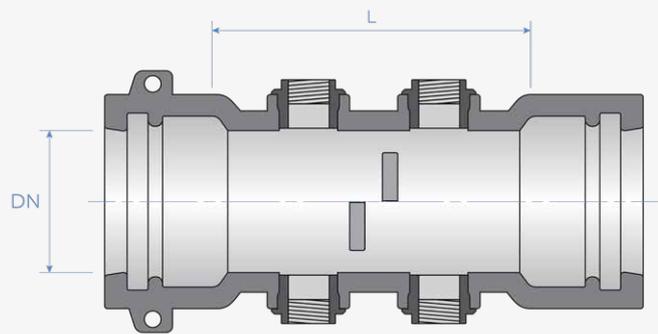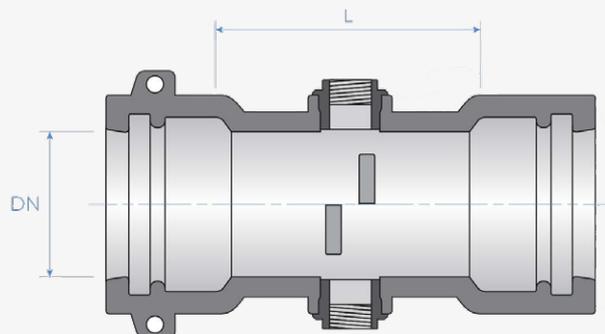

www.daemco.com.au
1800 323 626
enquiries@daemco.com.au

Scan QR Code for
Installation Instructions



Follow us on
LinkedIn



www.daemco.com.au



VALVES



COUPLINGS



ACCESSORIES



PE DI FITTINGS



COVERS



BANDS

65 Assembly Drive, Tullamarine VIC 3043
1800 323 626 | enquiries@daemco.com.au

Follow us on **LinkedIn**

©Copyright 2018. All Rights Reserved. Daemco Australia reserve the right to change designs and specifications without notice, warranties for suitability for use, liability or loss, damage or costs incurred relating to this information is excluded.