

# VALVE EXTENSION SPINDLES



## Design Advantage

- Integral cast ductile iron
- Hot dipped galvanised

## Technical Detail

**Range** 150mm to 1500mm  
\*Welded longer lengths available upon request



**Valves** Resilient and Metal Seat

**Valve Size** Up to and including DN600

**Applications** Suitable for above and below ground installations

## Compliance

- AS/NZS 2638.1 Test J
- AS/NZS 2638.2 Test M
- WSAA PA 1806

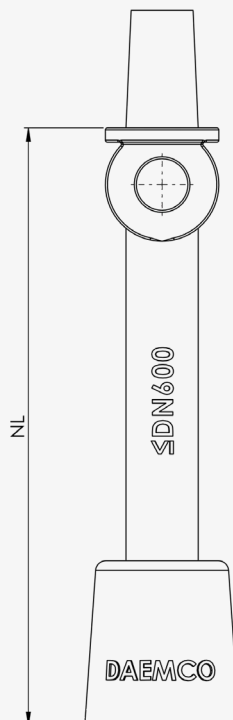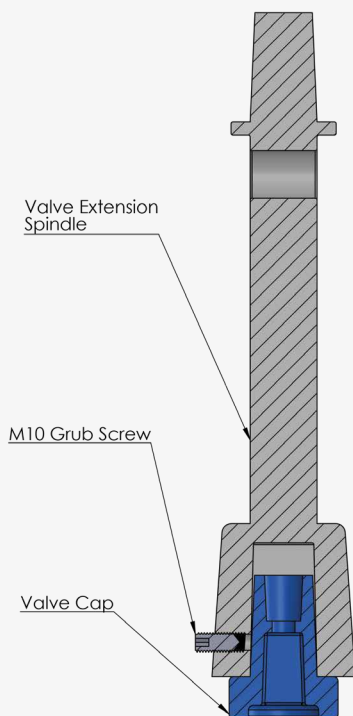

## NL (mm)

- 150
- 225
- 300
- 375
- 450
- 525
- 600
- 750
- 900
- 1000
- 1200
- 1500



www.daemco.com.au



VALVES



COUPLINGS



ACCESSORIES



PE DI FITTINGS



COVERS



BANDS

65 Assembly Drive, Tullamarine VIC 3043  
1800 323 626 | [enquiries@daemco.com.au](mailto:enquiries@daemco.com.au)

Follow us on **LinkedIn**

©Copyright 2018. All Rights Reserved. Daemco Australia reserve the right to change designs and specifications without notice, warranties for suitability for use, liability or loss, damage or costs incurred relating to this information is excluded.